



ASSEMBLY

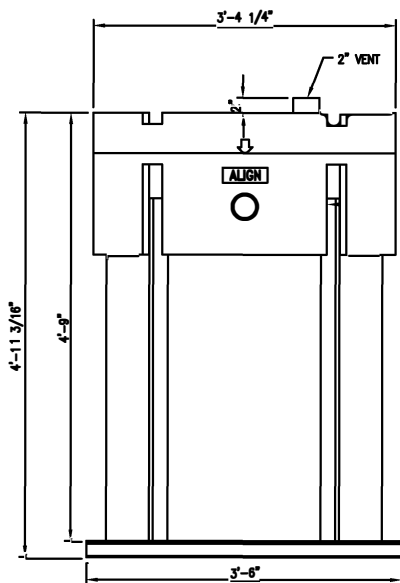

DISCHARGE VIEW

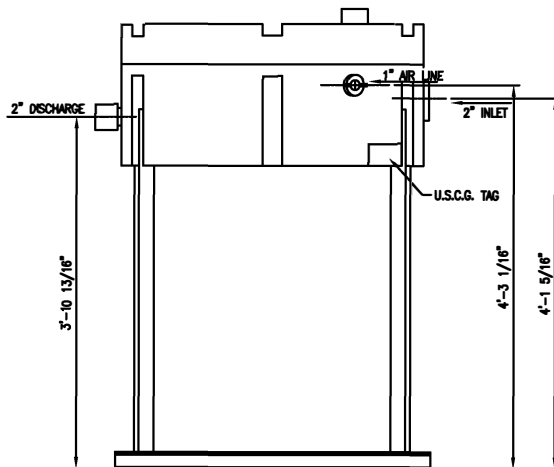

ELEVATION

BIO-SECTION
EST. WT.: 90 LBS. DRY
EST. WT.: 540 LBS. OPERATING

NOTE:
WHEN BIO-SECTION IS FULLY ASSEMBLED, THE ARROW, ON THE UD, AND TEXT "ALIGN", ON THE DISCHARGE SIDE, SHOULD LINE UP ONE ON TOP OF THE OTHER.

SHS Tech

120 Row 1
Lafayette, Louisiana

337501 8595

FAX: 337-456-3099

NOTES:

1. BASE OF CHLORINATOR TO BE EVEN OR LOWER THAT BASE OF BIO-SECTION.
2. SECURE TANKS' BASE STANDS ON A FLAT DECK OR BUILT UP FLAT SURFACE.
3. DO NOT COMBINE BIO-SECTION VENT WITH ANY OTHER VENT.
4. VENT TO TERMINATE NOT LESS THAN 10 FEET ABOVE WEATHER DECK, FROM ANY SOURCE OF IGNITION AND FROM ANY VENTILATION AIR INLET.
5. VENT TO TERMINATE HIGH RATHER THAN LOW, SINCE VENTED AIR IS WARMER THAN SURROUNDING AIR AND WILL RISE.
6. FLAME SCREEN IS NOT RECOMMENDED. IT WILL PLUG UP WITH LINT AND REQUIRE FREQUENT CLEANING. IF A FLAME SCREEN MUST BE USED, SCREEN TO BE TWO PIPE SIZES LARGER THAN VENT PIPE.
7. CONNECTING PIPING AND STANDARD PLUMBING PRACTICES AND INSTALLATION SHALL BE IN ACCORDANCE WITH REQUIREMENTS OF APPLICABLE REGULATORY BODIES.
8. FLEX OR HOSE CONNECTIONS RECOMMENDED FOR HOOK UP TO BIO-SECTION AND CHLORINATOR TO RELIEVE STRESS ON TANKS.
9. RECOMMENDED DISTANCE FROM CENTER OF BIO-SECTION TO CENTER OF CHLORINATOR IS 40".

DATE	DESCRIPTION	DRAWN BY	CLIENT
7/15/14	ISSUED FOR APPROVAL	S.S.	
8/28/15	ISSUED FOR CONSTRUCTION	S.S.	
			TITLE
			Model P 140 RT
			PROJECT
			DRAWN BY
			DATE DRAWN
			APPROVED BY
			SCALE
			UNIT
			DRAWING NUMBER

