
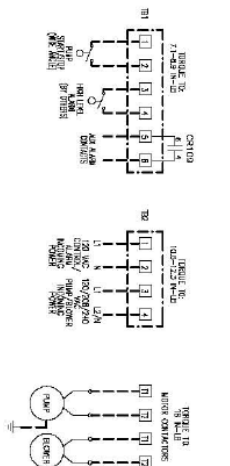
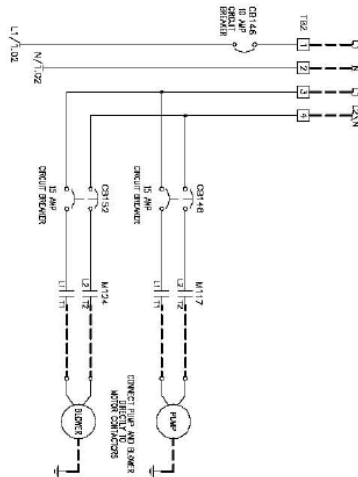


Single Phase

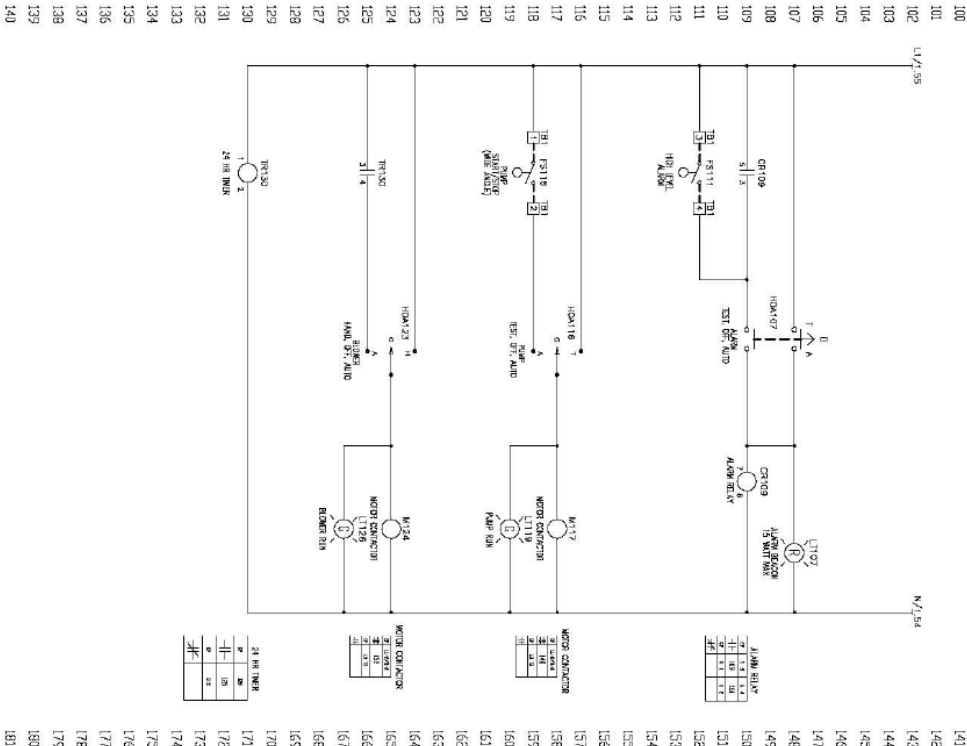

THE USE OF SEPARATE
POWER SOURCES FOR
PUMP/BLOWER AND
CONTROL/ALARM
ARE RECOMMENDED

TEMPERATURE RATING OF FIELD INSTALLED CONDUCTORS MUST BE AT LEAST 140 DEG. F. (60 DEG. C.). TERMINAL STRIPS AND GROUND LUG USE COPPER CONDUCTORS ONLY.

CONNECT GROUND LUG IN PANEL TO A SECURE EARTH GROUND.

DASHED LINES REPRESENT FIELD WIRING.

FIGURE 10
7-1-80 7-1-10

FIGURE 11
7-1-80 7-1-10

FIGURE 12
7-1-80 7-1-10

FIGURE 13
7-1-80 7-1-10

THE USE OF SEPARATE POWER SOURCES FOR THE CONTROL ALARM ARE RECOMMENDED.

DEFEND PROTECTION AND MUST BE SEEN ACCORDING TO CHIEF MANUFACTURERS SPECIFICATIONS.

FIELD WIRING SECTION

[illegible]



Marine Unit Aerator Only Single Phase

